




Altec A CLASS

Non-Overcenter Aerial Devices

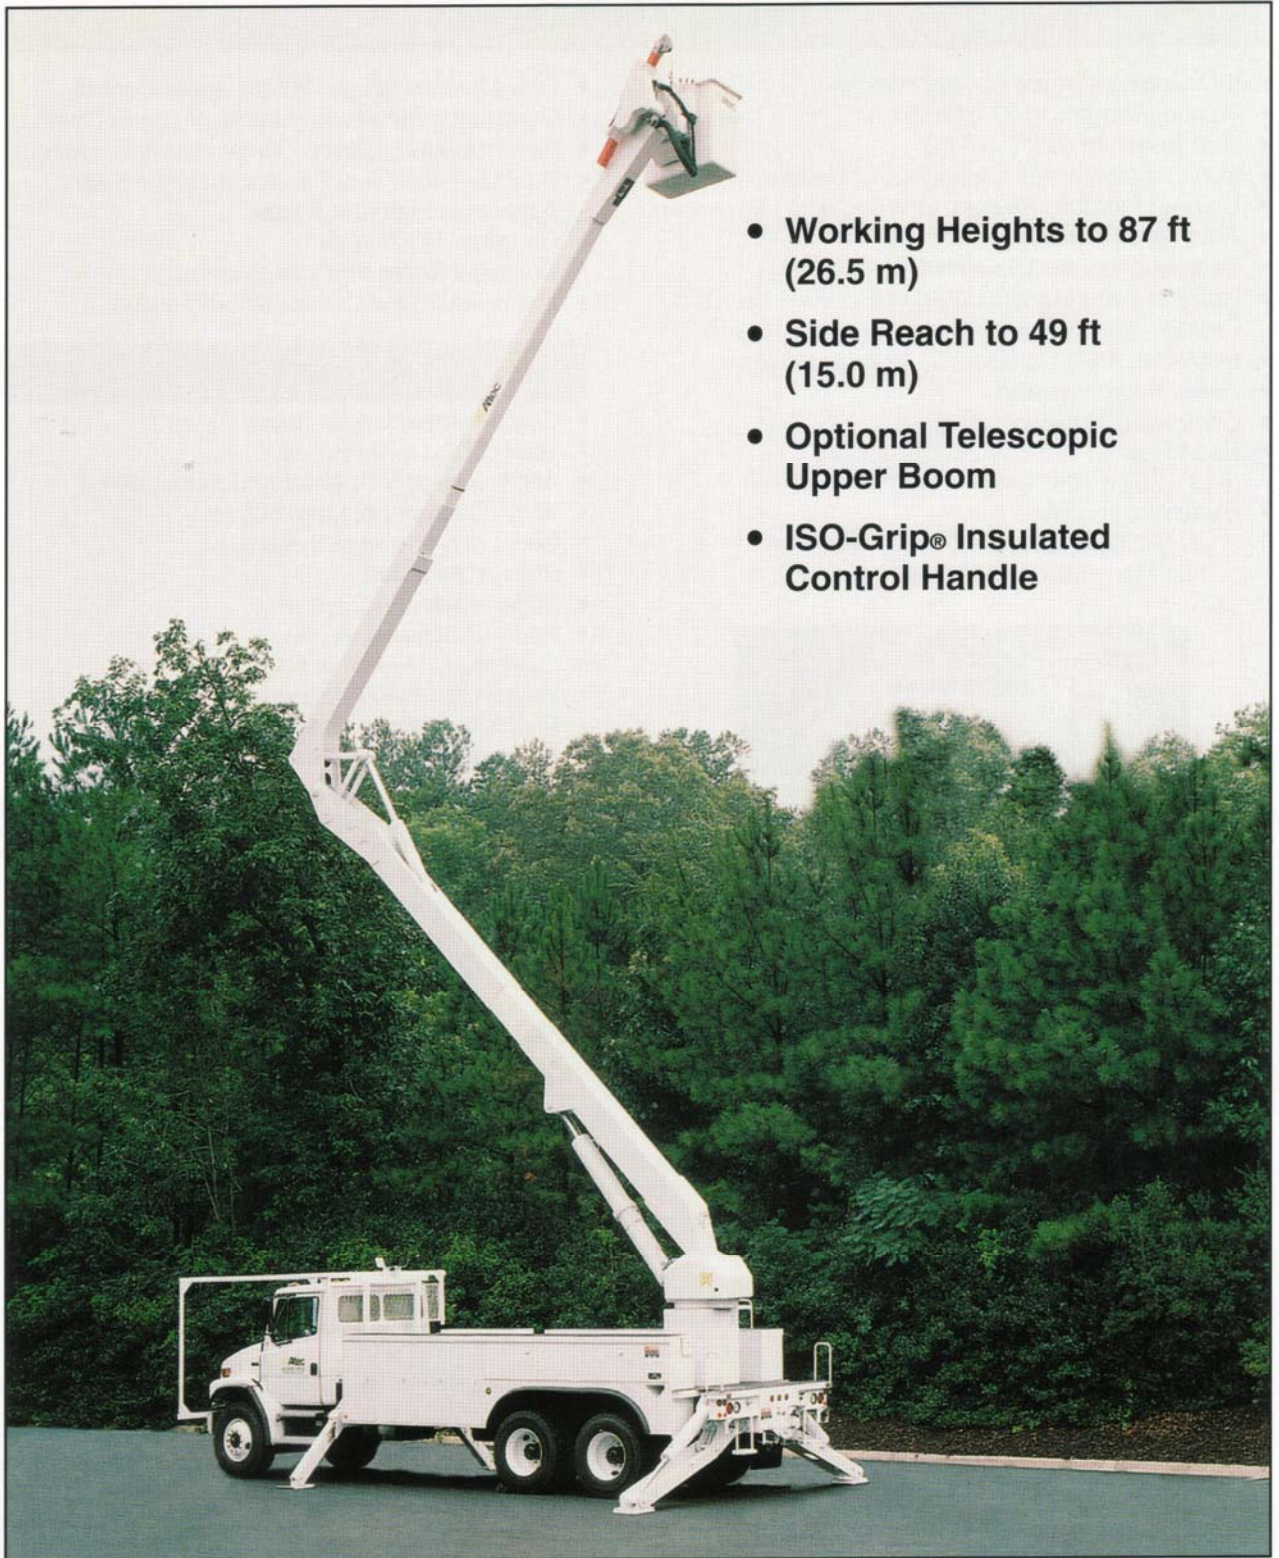

- Working Heights to 87 ft (26.5 m)
- Side Reach to 49 ft (15.0 m)
- Optional Telescopic Upper Boom
- ISO-Grip® Insulated Control Handle

STANDARD FEATURES

- ISO-Grip® Insulated Control Handle
- Working Heights to 87 ft (26.5 m)
- Side Reach to 49 ft (15.0 m)
- Non-Overcenter Articulating Aerial Device
- Unique Hydraulic Platform Leveling and Tilt System
- Automatic Boom Stow
- Designed for Low Lifecycle Cost
- Designed and Manufactured in ISO 9001 Certified Facility
- Insulated, ANSI Category C, 46 kV and Below
- Lower Boom Insulator
- Continuous Rotation
- End-Mounted Platform 24 x 30 x 42 in (610 x 762 x 1067 mm)
- Platform Capacity
 - Single, Dual (each): 400 lb (181.4 kg)
 - Two Man: 800 lb (362.9 kg)



Telescopic Upper Boom Provides Platform Access from the Ground

- Fully Metered Single Handle Upper Control
- Continuous Automatic Purging of Upper Controls
- Pilot Operated, Closed Center Hydraulic System
- Dual Hydraulic Tool Circuits at Platform with Adjustable Pressure & Flow
- Outrigger Motion Alarm
- Outrigger Boom Interlock System
- Machine/Ground Control Selector Valve

OPTIONS

- Compensated Upper Boom
- Telescopic Upper Boom
- ANSI, Category B, 46 kV and Below; 69 kV
- ANSI, Category A, up to 500 kV
- Secondary Stowage System
- Engine Start/Stop
- Material Handling System
- Hydraulic Extendible Jib
- Outriggers: A-Frame, Radial, Out/Down
- Phase Lifting Jib Attachment
- Platforms: Single, Dual, Two Man
- Platform Rotators, Hydraulic

RECOMMENDED FEATURES

- Fall Protection System
- Platform Liner
- Outrigger Pads
- Wheel Chocks

GENERAL SPECIFICATIONS

	A65		A70		A75		A72-T		A77-T		A82-T	
Platform Height*	65.1 ft	19.8 m	69.9 ft	21.3 m	74.8 ft	22.8 m	71.7 ft	21.9 m	76.5 ft	23.3 m	81.4 ft	24.8 m
Maximum Reach	36.9 ft	11.2 m	39.5 ft	12.0 m	42.2 ft	12.9 m	43.9 ft	13.4 m	46.5 ft	14.2 m	49.2 ft	15.0 m
Stowed Travel Height	12.5 ft	3.8 m	12.5 ft	3.8 m	12.5 ft	3.8 m	12.5 ft	3.8 m	12.5 ft	3.8 m	12.5 ft	3.8 m
Upper Boom Isolation	15.0 ft	4.6 m	15.0 ft	4.6 m	15.0 ft	4.6 m	15.0 ft	4.6 m	15.0 ft	4.6 m	15.0 ft	4.6 m
Lower Boom Isolation	30 in	762 mm	30 in	762 mm	30 in	762 mm	30 in	762 mm	30 in	762 mm	30 in	762 mm
Platform Capacity												
- Single, Dual (each)	400 lb	181.4 kg	400 lb	181.4 kg	400 lb	181.4 kg	400 lb	181.4 kg	400 lb	181.4 kg	400 lb	181.4 kg
- Two Man	800 lb	362.9 kg	800 lb	362.9 kg	800 lb	362.9 kg	800 lb	362.9 kg	800 lb	362.9 kg	800 lb	362.9 kg

*Based on 40 in (1016 mm) chassis frame

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.

Altec Sales and Service



Manufacturing and Service Facilities Located Throughout the United States and Canada

Altec Industries, Inc.
 Post Office Box 10264
 Birmingham, Alabama 35202
 Phone 205/991-7733
 Fax 205/991-9993